

RGF[®]

Rapid Recovery Unit™

ENVIRONMENTAL

Rapid Recovery Air Purification and Odor Destruction System **A Photohydroionization™ (PHI) Technology**

Ideal for hotel and motel rooms, suites and apartments. Can be used to rapidly and effectively treat many problem odor areas during daily maintenance and cleaning operations.



THE RGF *RAPID RECOVERY UNIT* ADVANCED OXIDATION GENERATOR IS DESIGNED TO DESTROY, NOT COVER UP, THE FOLLOWING ODORS:

Tobacco Odors
Chemical Fumes
Cleaning Chemical Odors
Cooking Odors
Decaying Organic Matter

Mold & Mildew
Paint Odors
Pet Odors
Sewer Odors
Volatile Organic Compounds

RGF'S PORTABLE, LIGHTWEIGHT UNIT IS IDEAL FOR:

Hotels/Motels/Resorts
Airplanes/Automobiles
Apartments/Condos

Fitness Facilities
Restaurants
Buses

Offices
Schools & Universities
Yachts & Boats


Photohydroionization™ Cell Module

An advanced oxidation reaction occurs when light energy from the **ultraviolet (UV) cell** reacts with oxygen, ozone, a small amount of moisture in the air, and a hydrated **quad-metallic catalyst**. This reaction creates cleansing ions, such as hydroperoxides and super oxide ions, which are exhausted from the system into the surrounding air. The treatment of your air includes:

- suppression of bacterial growth (bacteriostatic)
- suppression of mold growth (mycostatic)
- reduction of odors
- reduction of chemicals (VOCs)



PHI Cell

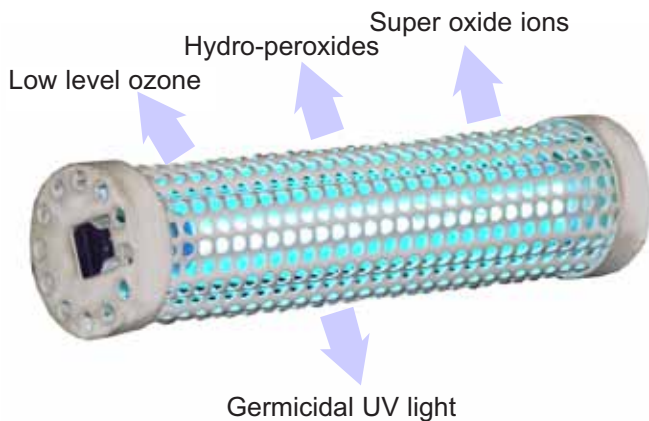

In addition to the PHI Effect the Rapid Recovery Units also utilize Odor Absorbing Media Filter. Filtration is not the core method utilized to reduce or eliminate odors. It is the advanced oxidizers, created by the PHI cells that actively treat the air external to the unit. The media filter cartridge enhances the speed and efficacy of the system by reducing gross particulate (e.g., smoke).

SPECIFICATIONS

| | |
|---|---|
| Fan Volume at Discharge | 42 ltr/sec |
| Weight | 5.4 kgs |
| Dimensions | 30.5 cm L x 33 cm W x 38 cm H |
| Target | Hydrated Tri-metallic |
| Approximate UV Chamber life | 5,000 Hrs |
| Voltage | 220 volt |
| Total Electrical | 1.25 amp |
| UV Chamber Electrical | .75 amp |
| Fan Electrical | .65 amp |
| Material/Finish | Stainless steel |
| Controls | On/Off Light 12 Hour Timer Hour Meter |
| Ultraviolet Chamber Replacement PHI Cell Part# | Electrically Excited Krypton Gas (2) PHIC-9A |

Distributed By:



Clean Marine Systems
 6/27 Annie Street, Wickham NSW 2293
 T (02) 4961 7100 F (02) 4961 6454
www.cleanms.com.au
 email: info@cleanms.com.au
 ABN. 99 138 941 125